

GMW116 Carbon Dioxide and Temperature Transmitter for Ventilation Control



The Vaisala CARBOCAP® Carbon Dioxide and Temperature Transmitter GMW116.

Features/Benefits

- Compact dual-parameter transmitter: measures both CO₂ and T
- Incorporates Vaisala CARBOCAP®, the silicon based NDIR sensor with unique internal referencing
- Advanced, single-beam, dual wavelength measurement with no moving parts
- Excellent long-term stability
- Ideal for ventilation control in all types of occupied spaces including those with around-the-clock occupancy
- No need for temperature compensation

The Vaisala CARBOCAP® Carbon Dioxide and Temperature Transmitter GMW116 is the compact-size transmitter that measures both carbon dioxide and temperature. The sensor is accurate and durable and it has an excellent long-term stability, which decreases maintenance.

The excellent performance of the Vaisala CARBOCAP® sensors results largely from the stable reference provided by the electrically tunable Fabry-Perot Interferometer (FPI).

In buildings with around-the-clock occupancy (e.g. hospitals, work-places, residential buildings, retirement homes), the assumed background CO₂ level reference is simply not applicable. The true internal reference measurement of

Vaisala CARBOCAP® CO₂ transmitters provides years of stable CO₂ measurements.

The GMW116 Transmitter is designed especially for demand controlled ventilation applications with CO₂ measurement range of 0 ... 2000 ppm and temperature range of 0 ... +50 °C.

With GMW116 there is no need for temperature compensation. The ideal gas temperature behaviour is taken into account automatically.

上海博众测量技术有限公司

Bodhi (Shanghai) measurement technology Co.,Ltd.
NO.32,ShuPing Road, JiadingDistrict, ZIP201808,
Shanghai R.P.China

TEL: 0086 21 6630 8161/62/63

FAX: 0086 21 6630 8167

Technical data

Performance

CO ₂ -measurement range	0 ... 2000 ppm
Temperature measurement range	0 ... +50 °C
Accuracy (including repeatability, non-linearity and calibration uncertainty)	± (2 % of range + 2 % of reading)
Long-term stability	± 5 % of range/5 years
Response time T90	1 min
Temperature dependence	compensated
Pressure dependence, typical	+0.15 % of reading/hPa
Temperature measurement accuracy	± 0.7 °C at 25 °
Warm-up time	1 min, 10 min for full specification
Product lifetime	> 10 years

Operating environment

Temperature	0 ... +50 °C
Humidity	0 ... 85 % RH
Pressure	700 ... 1200 hPa
Electromagnetic compatibility	Complies with EMS standard EN61326-1, Generic Environment




Inputs and outputs

Operating voltage	24 V (±20 %) AC/DC
Power consumption	< 2 W
Outputs	0 ... 10 V

Housing

Material	ABS/PC blend plastics
Weight	120 g
Cover and base colour	white RAL 9003
Fire resistance	UL94 V0
Ingress protection	IP30

Dimensions

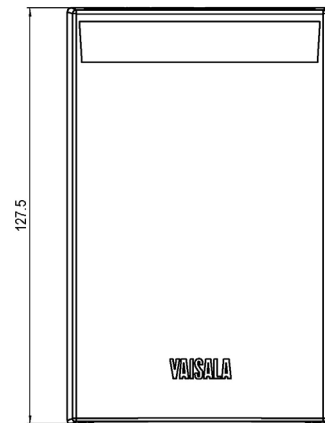

VAISALA

上海博众测量技术有限公司

Bodhi (Shanghai) measurement technology Co.,Ltd.
NO.32,ShuPing Road, Jiading District, ZIP201808,
Shanghai R.P.China
TEL: 0086 21 6630 8161/62/63
FAX: 0086 21 6630 8167

CE